




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/38		A1	(11) International Publication Number: WO 99/55114
			(43) International Publication Date: 28 October 1999 (28.10.99)
(21) International Application Number: PCT/US99/08584		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 19 April 1999 (19.04.99)			
(30) Priority Data: 09/062,839 20 April 1998 (20.04.98) US			
(71) Applicant: ERICSSON INC. [US/US]; 7001 Development Drive, P.O. Box 13969, Research Triangle Park, NC 27709 (US).			
(72) Inventors: HAVINIS, Theodore; 1520 Preston Road #427, Plano, TX 75093 (US). HAYES, Stephen; 2104 Via Madonna, Carrollton, TX 75006 (US). ROEL-NG, Maya; 1604 Chester Drive, Plano, TX 75025 (US).			
(74) Agents: MOORE, Stanley, R. et al.; Jenkins & Gilchrist, P.C., Suite 3200, 1445 Ross Avenue, Dallas, TX 75202 (US).		<p>Published</p> <p><i>With international search report.</i></p> <p><i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	

(54) Title: SYSTEM AND METHOD FOR DEFINING LOCATION SERVICES

(57) Abstract

A telecommunications system and method is disclosed for defining location services in a simplified manner based upon whether the positioning request is an interactive request or a batch mode request. In order to initiate a positioning request, a Location Application (LA) must first register with at least one Mobile Location Center (MLC), define the service parameters specific for that LA and receive a Location Application Identifier Number (LAIN). Thereafter, the LA can send either an interactive or batch mode positioning request along with the LAIN. An interactive positioning request is a request to position a specific subscriber or group of subscribers immediately, while a batch mode positioning request is a request to position a subscriber or group of subscribers when a particular event defined by the LA occurs. The definition of location services is decoupled from issues, such as the point of origin of the request, the identity of the subscriber to be positioned and authorization options.

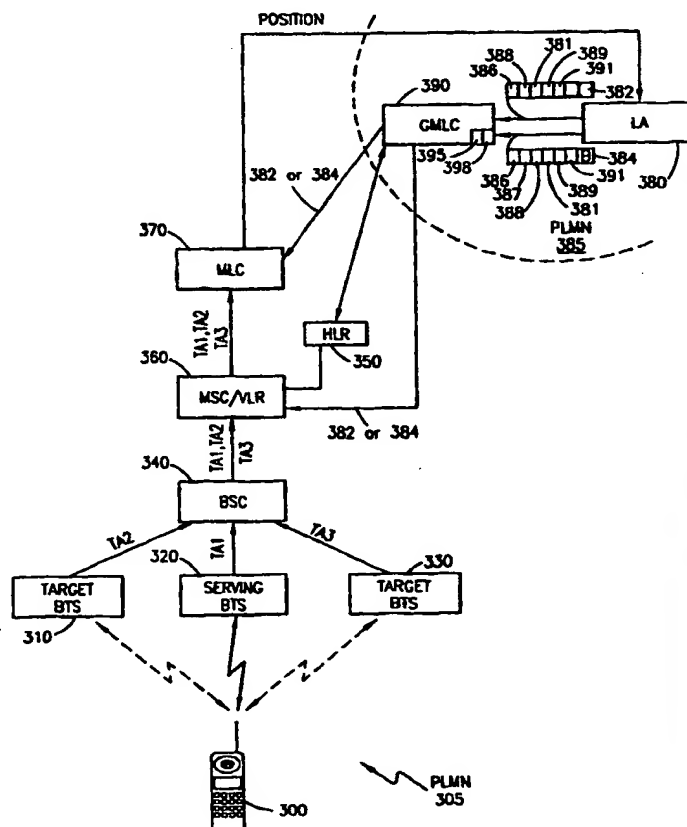

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

SYSTEM AND METHOD FOR DEFINING LOCATION SERVICES

BACKGROUND OF THE PRESENT INVENTION

Field of the Invention

5 The present invention relates generally to telecommunications systems and methods for determining the location of a mobile terminal within a cellular network, and specifically to defining a generic format for requesting location services, which can be tailored for each individual location application such that a positioning request can be sent by any location application within any cellular network.

Background and Objects of the Present Invention

10 Cellular telecommunications is one of the fastest growing and most demanding telecommunications applications ever. Today it represents a large and continuously increasing percentage of all new telephone subscriptions around the world. A standardization group, European Telecommunications Standards Institute (ETSI), was
15 established in 1982 to formulate the specifications for the Global System for Mobile Communication (GSM) digital mobile cellular radio system.

 With reference now to FIGURE 1 of the drawings, there is illustrated a GSM Public Land Mobile Network (PLMN), such as cellular network 10, which in turn is composed of a plurality of areas 12, each with a Mobile Switching Center (MSC) 14
20 and an integrated Visitor Location Register (VLR) 16 therein. The MSC/VLR areas 12, in turn, include a plurality of Location Areas (LA) 18, which are defined as that part of a given MSC/VLR area 12 in which a mobile station (MS) (terminal) 20 may move freely without having to send update location information to the MSC/VLR area 12 that controls the LA 18. Each Location Area 18 is divided into a number of cells
25 22. Mobile Station (MS) 20 is the physical equipment, e.g., a car phone or other portable phone, used by mobile subscribers to communicate with the cellular network 10, each other, and users outside the subscribed network, both wireline and wireless.

 The MSC 14 is in communication with at least one Base Station Controller (BSC) 23, which, in turn, is in contact with at least one Base Transceiver Station
30 (BTS) 24. The BTS is the physical equipment, illustrated for simplicity as a radio

-2-

tower, that provides radio coverage to the cell 22 for which it is responsible. It should be understood that the BSC 23 may be connected to several BTS's 24, and may be implemented as a stand-alone node or integrated with the MSC 14. In either event, the BSC 23 and BTS 24 components, as a whole, are generally referred to as a Base Station System (BSS) 25.

With further reference to FIGURE 1, the PLMN Service Area or cellular network 10 includes a Home Location Register (HLR) 26, which is a database maintaining all subscriber information, e.g., user profiles, current location information, International Mobile Subscriber Identity (IMSI) numbers, and other administrative information, for subscribers registered within that PLMN 10. The HLR 26 may be co-located with a given MSC 14, integrated with the MSC 14, or alternatively can service multiple MSCs 14, the latter of which is illustrated in FIGURE 1.

The VLR 16 is a database containing information about all of the MS's 20 currently located within the MSC/VLR area 12. If an MS 20 roams into a new MSC/VLR area 12, the VLR 16 connected to that MSC 14 requests data about that MS 20 from the HLR database 26 (simultaneously informing the HLR 26 about the current location of the MS 20). Accordingly, if the user of the MS 20 then wants to make a call, the local VLR 16 will have the requisite identification information without having to reinterrogate the HLR 26. In the aforescribed manner, the VLR and HLR databases 16 and 26, respectively, contain various subscriber information associated with a given MS 20.

Determining the geographical position of a MS 20 within a cellular network 10 has recently become important for a wide range of applications. For example, positioning services may be used by transport and taxi companies to determine the location of their vehicles. In addition, for emergency calls, e.g., 911 calls, the exact location of the mobile terminal 20 may be extremely important to the outcome of the emergency situation. Furthermore, positioning services can be used to determine the location of a stolen car, for the detection of home zone calls, which are charged at a lower rate, for the detection of hot spots for micro cells, or for the subscriber to determine, for example, the nearest gas station, restaurant, or hospital, e.g., Where am I service.

-3-

As can be seen in FIGURE 2 of the drawings, upon a network positioning request, the Base Station System (BSS) (220 and 240) serving the MS 200 to be positioned generates positioning data, which is delivered to the MSC 260. This positioning data is then forwarded to a Mobile Location Center (MLC) 270 for calculation of the geographical location of the MS 200. The location of the MS 200 can then be sent to a Location Application (LA) 280 that requested the positioning. Alternatively, the requesting LA 280 could be located within the MS 200 itself, within the MSC/VLR 260 or could be an external node, such as an Intelligent Network (IN) node.

In order to accurately determine the location of the MS 200, positioning data from three or more separate BTS's (210, 220, and 230) is required. This positioning data for GSM systems can include, for example, a Timing Advance (TA) value, which corresponds to the amount of time in advance that the MS 200 must send a message in order for the BTS 220 to receive it in the time slot allocated to that MS 200. When a message is sent from the MS 200 to the BTS 220, there is a propagation delay, which depends upon the distance between the MS 200 and the BTS 220. TA values are expressed in bit periods, and can range from 0 to 63, with each bit period corresponding to approximately 550 meters between the MS 200 and the BTS 220.

Once a TA value is determined for one BTS 220, the distance between the MS 200 and that particular BTS 220 is known, but the actual location is not. If, for example, the TA value equals one, the MS 200 could be anywhere along a radius of 550 meters. Two TA values from two BTSs, for example, BTSs 210 and 220, provide two possible points that the MS 200 could be located (where the two radiuses intersect). However, with three TA values from three BTSs, e.g., BTSs 210, 220, and 230, the location of the MS 200 can be determined with a certain degree of accuracy. Using a triangulation algorithm, with knowledge of the three TA values and site location data associated with each BTS (210, 220, and 230), the position of the MS 200 can be determined (with certain accuracy) by the MLC 270.

It should be understood, however, that any estimate of time, distance, or angle for any cellular system 205 can be used, instead of the TA value discussed herein. For example, the MS 200 can have a Global Positioning System (GPS) receiver built into

-4-

it, which is used to determine the location of the MS 200. In addition, the MS 200 can collect positioning data based on the Observed Time Difference (OTD) between the time a BTS 220 sends out a signal and the time the MS 200 receives the signal. This time difference information can be sent to the MLC 270 for calculation of the location of the MS 200. Alternatively, the MS 200, with knowledge of the location of the BTS 220, can determine its location.

As the market demands higher accuracy, it is becoming necessary for the network 205 to have knowledge of all relevant input factors. Such input factors include the requested quality of service, time of day of request, the requesting LA, subscription status of the subscriber, as well as positioning method capabilities of the serving network 205 and of the subscriber terminal 200. Recent attempts to define location services have focused upon the point of origin of the positioning request, e.g., an external LA 280, a network-based LA 280 or a LA 280 residing within the MS 200, the identity of the subscriber to be positioned, and issues regarding privacy and authorization of the LA 280 to perform the positioning. However, by defining location services in this manner, all possible or potential parameters, e.g., authorization codes, positioning method, emergency override on privacy, and group identification, need to be defined and the format established prior to implementing the location service. In addition, existing definitions require built-in dependencies between location services and the point of origin of the positioning request, the identity of the subscriber to be positioned, and authorization and privacy options. Thus, network operators cannot tailor location services for specific LA's 280 without introducing new authorization procedures for all LA's 280.

It is, therefore, an object of the present invention to define a generic format for positioning requests sent by Location Applications such that the location services can be utilized by any positioning system within any wireless network.

It is a further object of the present invention to allow network operators to define location services based upon the service parameters required by each individual Location Application.

SUMMARY OF THE INVENTION

The present invention is directed to telecommunications systems and methods for defining location services in a simplified manner based upon whether the positioning request is an interactive request or a batch mode request. In order to initiate a positioning request, the requesting Location Application (LA) must first register with at least one Gateway Mobile Location Center (GMLC), define the service parameters specific for that LA and receive a Location Application Identifier Number (LAIN). Thereafter, the LA can send either an interactive or batch mode positioning request, depending upon the service parameters established by that LA. An interactive positioning request is a request to position a specific subscriber or group of subscribers immediately, while a batch mode positioning request is a request to position a subscriber or group of subscribers when a particular event defined by the requesting application occurs. Advantageously, by defining location services in the aforementioned manner, the definition of location services becomes decoupled from issues, such as the point of origin of the request, the identity of the subscriber to be positioned and authorization and privacy options.

BRIEF DESCRIPTION OF THE DRAWINGS

The disclosed inventions will be described with reference to the accompanying drawings, which show sample embodiments of the invention and which are incorporated in the specification hereof by reference, wherein:

FIGURE 1 is a block diagram of a conventional terrestrially-based wireless telecommunications system;

FIGURE 2 illustrates a sample positioning handover in which positioning data is acquired by a target base transceiver station and transmitted to a serving base station controller;

FIGURE 3 illustrates positioning of at least one mobile terminal by a Location Application (LA), which has defined its location services in accordance with preferred embodiments of the present invention;

-6-

FIGURE 4 demonstrates steps in a sample defining of location services and sending of a positioning request by a requesting LA in accordance with preferred embodiments of the present invention; and

FIGURE 5 demonstrates steps in a sample positioning of a specific mobile terminal by a LA, which has defined its location services in accordance with preferred embodiments of the present invention.

DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EXEMPLARY EMBODIMENTS

The numerous innovative teachings of the present application will be described with particular reference to the presently preferred exemplary embodiments. However, it should be understood that this class of embodiments provides only a few examples of the many advantageous uses of the innovative teachings herein. In general, statements made in the specification of the present application do not necessarily delimit any of the various claimed inventions. Moreover, some statements may apply to some inventive features but not to others.

With reference now to FIGURE 3 of the drawings, which will be described in connection with FIGURE 4 of the drawings, prior to sending a positioning request (step 430 or 460), a requesting Location Application (LA) 380 must first register with a Gateway Mobile Location Center (GMLC) 390 (step 400) and define within, for example, a database 398 within the GMLC 390 its location services profile, e.g., all of the relevant service parameters specific to that LA 380 (step 410). For example, the LA 380 can define whether the LA 380 has the authority to initiate an interactive positioning request 382, a batch mode positioning request 384 or both. In addition, the LA 380 can define whether the LA 380 has the authority to override privacy settings of all subscribers, as in the case of an emergency center, or particular subscribers, as in the case of a law enforcement agency. Furthermore, the LA 380 can define whether the LA 380 is associated with a group of subscribers, e.g., a fleet management company, and the particular Mobile Station International Subscriber Directory Number's (MSISDN's) associated with that group. The MSISDN is the digit string associated with a particular Mobile Station (MS) 300.

-7-

Once the LA 380 has defined the service parameters 398 specific to that LA 380 (step 410), the GMLC 390 assigns a Location Application Identifier Number (LAIN) 386 (step 420), which identifies the particular LA 380 and the associated service parameters 398. Thereafter, the requesting LA 380 can send its LAIN 386 in
5 either an interactive positioning request 382 (step 430) or a batch mode positioning request 384 (step 460) for a particular MS 300 or a group of MS's 300 to the GMLC 390, which is the GMLC 390 for the Public Land Mobile Network (PLMN) 385 that the LA 380 is in. An interactive positioning request 382 is performed immediately upon verification of authorization, using the service parameters 398 defined by the LA
10 380, while a batch mode positioning request 384 is performed only upon the occurrence of an event defined by the LA 380 when the batch mode positioning request 384 is sent.

If the positioning request is an interactive positioning request 382 (step 430), the LA 380 must include the LAIN 386 (step 435) and the MSISDN(s) 388 (step 440)
15 for the MS(s) 300 to be positioned and quality of service information 381 (step 445). If, the LA 380 is a group-related application, a group ID associated with the MSISDN's to be positioned can be sent with the positioning request. The GMLC 390 can then cross-reference the group ID with the LAIN 386 and verify that the specified MSISDNs 388 associated with the MSs 300 to be positioned belong to the specified
20 group ID to ensure that the LA 380 has the authority to position those MS's 300.

In addition, the LA 380 can also include a number of optional service parameters 389 (step 450) along with the interactive positioning request 382, together with the mandatory LAIN 386, MSISDN(s) 388 associated with the MS(s) 300 to be positioned and quality of service information 381. For example, if the LA 380 is a
25 group-related application, a requesting identifier number may also need to be included to identify the particular person who is requesting the positioning of the MS's 300 within the group. As an example, if the LA 380 is a fleet management system, where numerous employees have access to the system that initiates the positioning requests, certain employees may not have access to the system, or may only have limited access
30 to the system, e.g., only certain MS's 300 within the group can be positioned by that employee. Thus, when the fleet management company defines its service parameters

-8-

398 (step 410), it can require the inclusion of a requesting identifier number in the interactive positioning request 382 in order to prevent unauthorized positioning of the MS's 300 within the fleet management system group.

Another optional service parameter 389, which can be included along with the interactive positioning request 382, is a called-party number, which can be used by the GMLC 390 to verify whether or not the particular MS 300 to be positioned currently has a connection with that called-party number. For example, if the LA 380 is a taxi dispatch service, and a subscriber has called that taxi service requesting a taxi, but is unsure of his or her current location, the taxi dispatch service can initiate a positioning request for the MS 300 associated with that subscriber in order to send a taxi to that subscriber's location. If the taxi dispatch service defined its location services profile 398 (step 410) such that the positioning of a MS 300 can only be performed if that MS 300 has a call connection to the number associated with the taxi service, the taxi dispatch service can include the called-party number, which is the digit string associated with the taxi dispatch service, in the interactive positioning request 382. In addition, the taxi dispatch service can also include a calling-party number, which is the MSISDN associated with the MS 300 of the subscriber requesting the taxi. Therefore, by using the called-party number and calling-party number, the GMLC 390 can determine whether the MS 300 to be positioned has a call connection to the taxi company, and thus, whether the LA 380 has the authority to position that MS 300.

In some situations, the MS 300 may have a call connection to a third party, e.g., a service which provides transportation to subscribers who have been drinking, which is relaying the request for taxi service to the taxi dispatch service. In that case, a redirected number can also be included along with the called-party number and calling-party number in the interactive positioning request 382.

Finally, the LA 380 can include optional conditions 391 (step 455) in the interactive positioning request 382. For example, the LA 380 can specify that the positioning should only be performed if the MS 300 is within a certain geographical area, e.g., a cell, location area, local access transport area, Mobile Switching Center area, state, or country. In addition, the LA 380 can specify that the positioning should only be performed if the MS 300 is in a particular state, e.g., connected to a particular

-9-

number, as described in the taxi example hereinbefore. It should be understood that many other types of conditions 391 and/or optional service parameters 389 can be included in the interactive positioning request 382, depending upon the needs of the particular LA 380.

5 If the positioning request is a batch mode positioning request 384 (step 460), the LA 380 must include its LAIN 386 (step 465), the quality of service information 381 (step 468) and a particular event 387 (step 470) which must occur for positioning to be performed. The MSISDN(s) 388 associated with the MS(s) to be positioned are also typically required to be included in the batch mode positioning request 384.

10 However, if the LA 380 is an emergency center, the emergency center can define the event 387 as position any MS 300 that dials "911", regardless of the MSISDN 388 or whether the particular MS 300 has an MSISDN 388 (in the case where service for the MS 300 has not yet been activated). In that case, when an MS 300 dials "911", a Mobile Switching Center/Visitor Location Register (MSC/VLR) 360 serving the area

15 305 that the MS 300 is in triggers the positioning request in a serving Mobile Location Center (MLC) 370, and positioning of the MS 300 is performed. Thus, the emergency call can be routed to the appropriate Public Safety Answering Point (PSAP) (not shown) and emergency services can be dispatched to the current location of the MS 300.

20 The event 387 which triggers positioning of the MS 300 can range from a call originated by the MS 300 to a location update performed by the MS 300. For example, if the MS 300 has a location-based charging service plan, every time the MS 300 places a call, positioning of the MS 300 is performed to determine the amount to charge the subscriber for the call. In this case, the LA 380 would send a batch mode

25 positioning request 384 for the MSISDN 388 associated with the MS 300 to be positioned and an indication (event 387) that positioning is to be performed only when the MS 300 originates a call. In an alternative embodiment, the LA 380 can specify (define the event 387) that positioning of the MS 300 is only performed when a mobile terminating call occurs, e.g., the MS 300 receives a call.

30 In addition, the triggering event 387 can be a Short Message Service (SMS) message sent from or to the MS 300. Alternatively, the event 387 could be an

-10-

Unstructured Supplementary Service Data (USSD) message, a Call Independent Supplementary Service (CISS) message or a Location Update message. Furthermore, as discussed hereinbefore, an emergency center can send a positioning request without an indication of the MSISDN 388 to the GMLC 390 and request (include an event
5 387) positioning to be performed only when the MSC/VLR 360 receives a "911" call.

It should, therefore, be understood that any triggering event 387 can be defined by the LA 380, and only upon the occurrence of the event 387, is the MS 300 positioned. Alternatively, the LA 380 can define a series of events 387 to occur before positioning is performed. For example, the LA 380 can define the events 387 such
10 that upon the occurrence of a specified event 387, the LA 380 is notified of the occurrence, and the LA must then send a message, such as "proceed with the positioning," for positioning to occur. If, for example, the first event 387 is the performance of a location update (either periodic or when the MS 300 actually enters into a new location area), the GMLC 390 can notify the LA 380 that a location update
15 has occurred. Thereafter, if the LA 380 desires positioning to be performed, the LA 380 can send a message, such as "proceed with the positioning," to the GMLC 390, which is the second event 387 defined by the LA 380 for positioning to occur.

Optional service parameters 389 can also be included (step 475) in the batch mode positioning request 384, such as the requesting identifier number, as described
20 hereinabove. In addition, conditions 391 can be included, such as the location of the MS 300 or the state of the MS 300, e.g., call connected.

With reference now to FIGURE 5 of the drawings, once the GMLC 390 determines that the LA 380 is authorized to request positioning of the MS 300 (step 500), the GMLC 390 can then send a request for routing information (step 505), e.g.,
25 the address of the Mobile Switching Center/Visitor Location Register (MSC/VLR) 360 serving the PLMN 305 that the MS 300 is currently located in and positioning subscription information for the MS 300, to the MS's 300 Home Location Register (HLR) 350, using the MS's 300 directory number as a global title. The signaling network, e.g., the Signaling System #7 (SS7) network (not shown), can perform a
30 global title translation on the MSISDN 388 and route the request to the appropriate HLR 350 for the MS 300. It should be noted that if, however, the LA 380 is not

-11-

authorized to request positioning of the MS 300 (step 500), the positioning request 382 or 384 is rejected by the GMLC 390 (step 510) and a rejection message is sent to the LA 380 (step 515).

5 The HLR 350 then checks its records to confirm that the MS 300 is registered in the HLR 350 (step 520), and that routing information for that MS 300 is available (step 525). If the MS 300 is not registered in the HLR 350 (step 520) or the routing information is not available (step 525), the routing information request is rejected by the HLR 350 (step 510) and the GMLC 390 sends a rejection message to the LA 380 (step 515). However, if the MS 300 is registered in the HLR 350 (step 520) and
10 routing information is available (step 525), the routing information, e.g., the serving MSC/VLR 360 address, together with the positioning subscription information, is sent to the GMLC 390 (step 530).

The GMLC 390 then verifies that the MS 300 to be positioned by the LA 380 allows positioning to be performed, by checking the positioning subscription
15 information, e.g., privacy indication, sent by the HLR 350 (step 535). Alternatively, the serving MSC/VLR 360 or serving MLC 370 can check the privacy indication of the MS 300. However, if, for example, the LA 380 is an emergency center or a law enforcement agency, the LA 380 can define its location services 398 (step 410) such that the privacy indications established by the subscriber can be overridden to perform
20 positioning. In this case, the GMLC 390 does not check the privacy indications of the MS 300. If the MSC/VLR 360 or MLC 370 normally performs the check, the privacy override indication is passed onto the MSC/VLR 360 or MLC 370 from the GMLC 390 along with the positioning request 382 or 384. It should be noted that other service parameters (either defined 398 originally by the LA 380 or sent 389 and 391
25 with the positioning request 382 or 384) can also be passed onto additional nodes during the positioning process.

If the MS 300 does not allow positioning (step 535), the positioning request 382 or 384 is rejected (step 510) and a rejection message is sent to the LA 380 (step 515). However, if the MS 300 does allow positioning (step 535), the GMLC 390 can
30 then send the positioning request to the serving MSC/VLR 360 (step 540), using the MSC/VLR 360 address. Thereafter, the serving MSC/VLR 360 will route the

-12-

positioning request to the MLC 370 serving the PLMN 305 that the MS 300 is located in (step 545). It should be understood that the MLC 370 can be co-located with the serving MSC/VLR 360 or can be a separate node.

5 Alternatively, after the GMLC 390 confirms that the MS 300 allows positioning to be performed (step 535), the GMLC 390 can derive, from the MSC/VLR 360 address, the address of the MLC 370 in the serving PLMN 305, using, for example, a look-up table (database) 395. Thereafter, the positioning request 382 or 384 can be routed directly to the MLC 370 in the serving PLMN 305 (step 545).

10 Once the positioning request 382 or 384 is received by the serving MLC 370 (step 545), the MLC 370 sends the positioning request 382 or 384 to the serving MSC/VLR 360 (step 550), which can then forward the positioning request 382 or 384 to a Base Station Controller (BSC) 340 (step 555). If the MS 300 is in idle mode, the serving MSC/VLR 360 must page the MS 300 and setup a call to the MS 300 prior to forwarding the positioning request 382 or 384 to the BSC 340 (step 555). This call
15 does not activate the ringing tone on the MS 300, and therefore, is not noticed by the MS 300.

The originating BSC 340 then determines which Base Transceiver Station (BTS) 320 is currently serving the MS 300, and obtains a Timing Advance (TA) value (TA1), or other positioning data, from this serving BTS 320 (step 560), if possible.
20 Thereafter, TA values are obtained from at least two target BTSs (310 and 330) (step 565) by performing a positioning handover. If the serving BTS 320 does not support positioning, an additional target BTS (not shown) must be selected. It should be noted that other positioning methods can be used instead of obtaining TA values, as discussed herein. In addition, positioning of the MS 300 can be performed using more
25 than three BTSs (310, 320, and 330).

The TA values (TA2 and TA3) measured by the target BTS's (310 and 330) are then transmitted by the serving BSC 340 to the MSC 360, together with the TA value TA1 obtained from the serving BTS 320 (step 570). Finally, the TA values (TA1, TA2 and TA3) are forwarded to the serving MLC 370 from the MSC/VLR 360
30 (step 575), where the location of the MS 300 is determined using the triangulation

-13-

algorithm (step 580). The MLC 370 then presents the geographical position of the MS 300 to the requesting LA (node) 380 (step 585).

5 As will be recognized by those skilled in the art, the innovative concepts described in the present application can be modified and varied over a wide range of applications. Accordingly, the scope of patented subject matter should not be limited to any of the specific exemplary teachings discussed.

For example, it should be noted that the location services can be used by applications located-in or connected-to the subscriber's MS, by network applications or by external applications.

10 In addition, it should be understood that other positioning methods, instead of the Timing Advance positioning method discussed herein, can be used to determine the location of the mobile terminal. For example, such positioning methods can include: Time of Arrival, Angle of Arrival, Global Positioning System, Observed Time Difference, or Enhanced Observed Time Difference.

15 Furthermore, it should be understood that the positioning systems and methods disclosed herein can be utilized by any cellular network, including, but not limited to the Global System for Mobile Communications (GSM) network, the Personal Communications Systems (PCS) network, the AMPS network and the D-AMPS network.

-14-

WHAT IS CLAIMED IS:

1. A telecommunications system for defining location services profiles within a cellular network, said telecommunications system comprising:

5 a mobile location center within said cellular network, said mobile location center having a database therein for storing location information; and

a location node in communication with said mobile location center, said location node registering with said mobile location center and defining said location information stored within said database, said mobile location center assigning an identifier number to said location node, said location node sending a positioning request containing said identifier number to said mobile location center.

10

2. The telecommunications system of Claim 1, wherein said positioning request is an interactive positioning request, said interactive positioning request including a Mobile Station International Subscriber Directory Number therein, said Mobile Station International Subscriber Directory Number being associated with a mobile terminal to be positioned, said mobile terminal being in wireless communication with a mobile switching center, said mobile switching center being connected to said mobile location center.

15

3. The telecommunications system of Claim 1, wherein said positioning request is a batch mode positioning request, said batch mode positioning request having an event associated therewith, said event indicating to said mobile location center when to perform positioning of a mobile terminal in wireless communication with a mobile switching center, said mobile switching center being connected to said mobile location center.

20

25

4. The telecommunications system of Claim 1, wherein said positioning request has an optional parameter therein.

5. The telecommunications system of Claim 1, wherein said positioning request has a condition parameter therein.

30

-15-

6. The telecommunications system of Claim 1, wherein said positioning request has a quality of service parameter therein.

7. The telecommunications system of Claim 1, wherein said mobile
5 location center is a gateway mobile location center.

8. A method for defining location services within a cellular network, said method comprising the steps of:

10 registering, by a location node in communication with a mobile location center, with said mobile location center;

defining, by said location node, location information associated with said location node, said location information being stored in a database within said mobile location center;

15 assigning, by said mobile location center, an identifier number to said location node; and

sending, by said location node, a positioning request to said mobile location center, said positioning request containing said identifier number.

9. The method of Claim 8, wherein said positioning request is an
20 interactive positioning request, said interactive positioning request including a Mobile Station International Subscriber Directory Number therein, and further comprising, after said step of sending said positioning request, the step of:

25 positioning, by said mobile location center, a mobile terminal associated with said Mobile Station International Subscriber Directory Number, said mobile terminal being in wireless communication with a mobile switching center, said mobile switching center being connected to said mobile location center.

10. The method of Claim 8, wherein said positioning request is a batch mode positioning request, said batch mode positioning request having an event
30 associated therewith, and further comprising, after said step of sending said positioning request, the step of:

-16-

positioning, by said mobile location center, a mobile terminal when said event occurs, said mobile terminal being in wireless communication with a mobile switching center, said mobile switching center being connected to said mobile location register.

5 11. The method of Claim 8, wherein said positioning request has an optional parameter therein.

 12. The method of Claim 8, wherein said positioning request has a condition parameter therein.

10

 13. The method of Claim 8, wherein said positioning request has a quality of service parameter therein.

15

 14. The method of Claim 8, wherein said mobile location center is a gateway mobile location center.

1/5

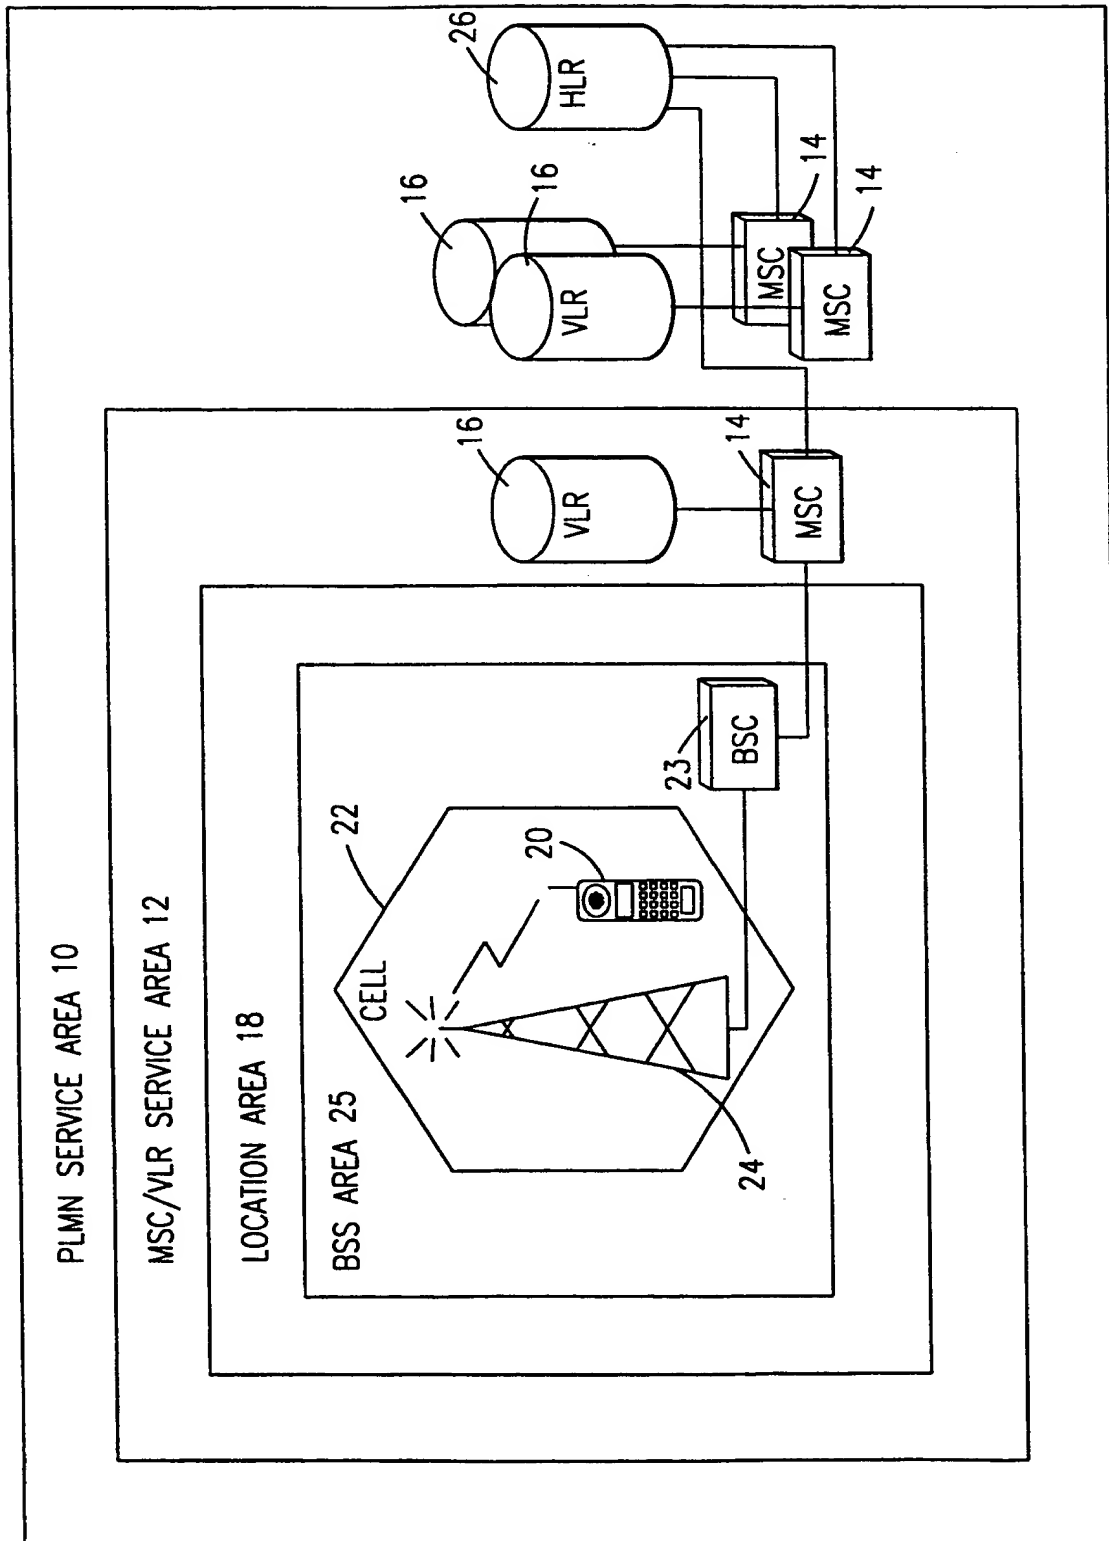


FIG. 1

THIS PAGE BLANK (USPTO)

2/5

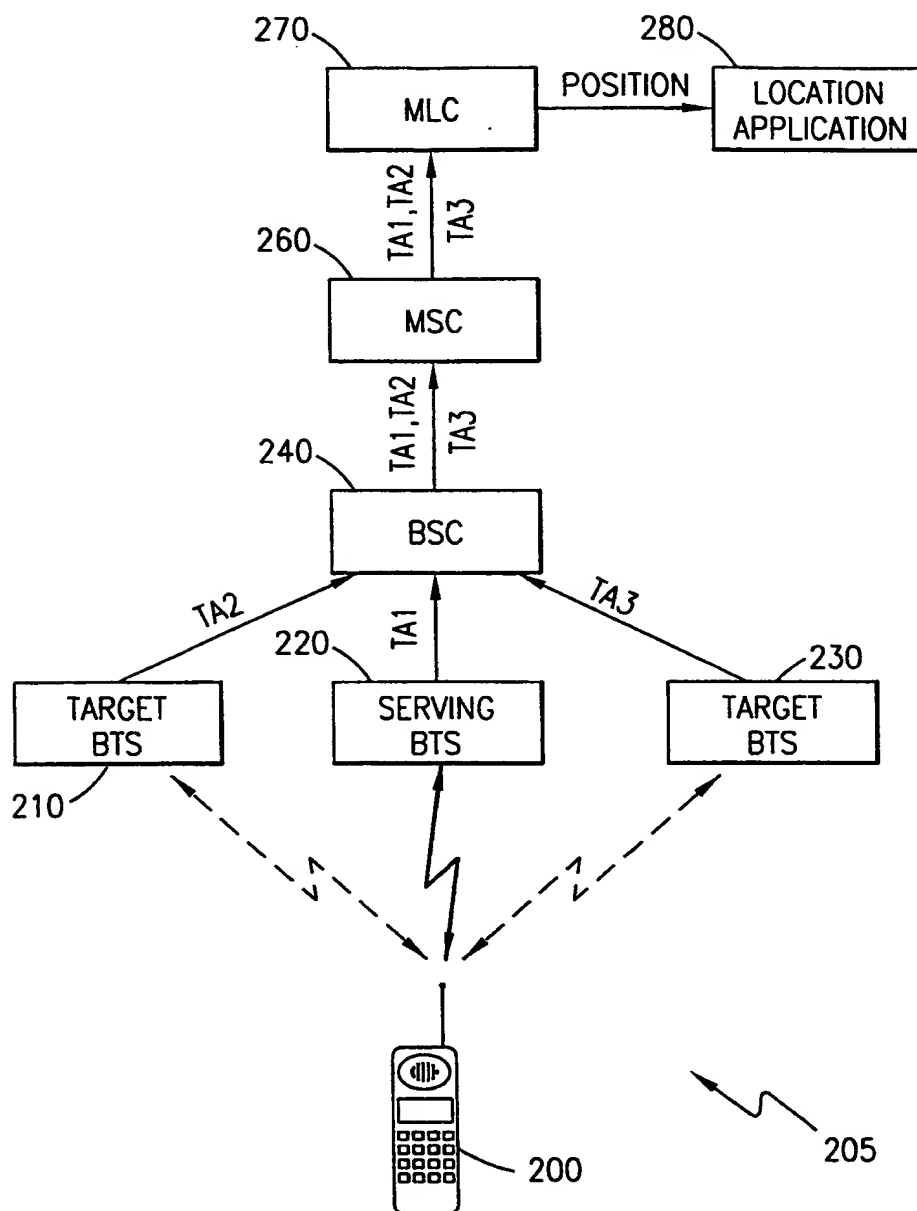


FIG. 2

THIS PAGE BLANK (USPTO)

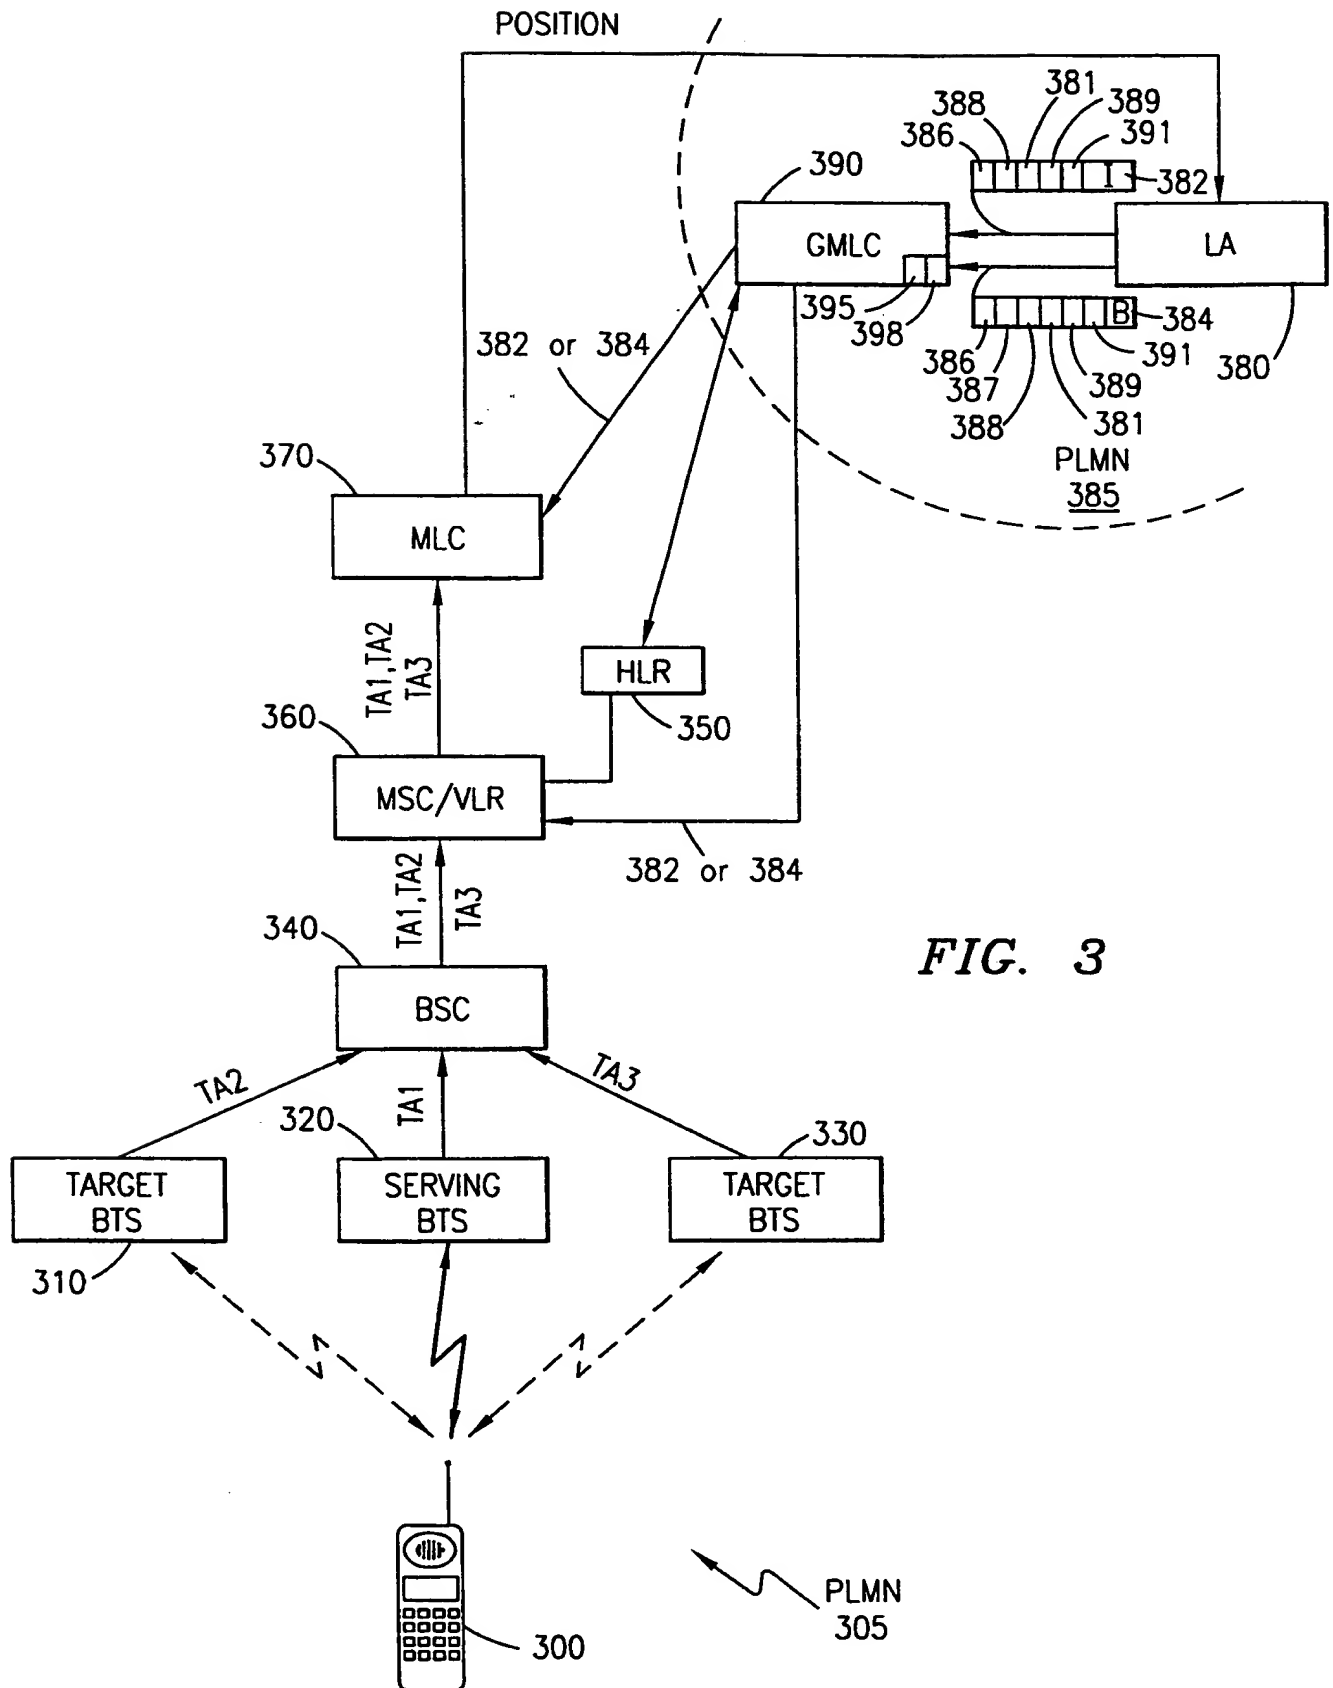
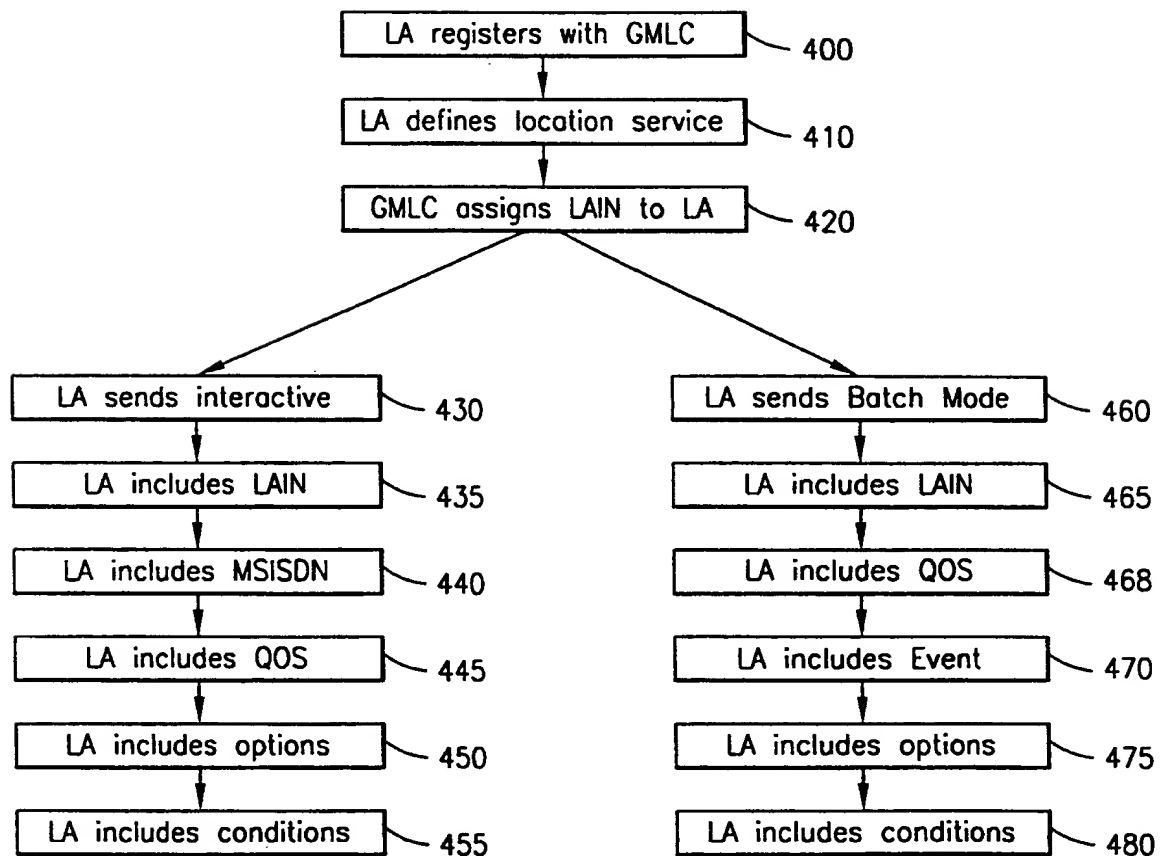


FIG. 3


THIS PAGE BLANK (USPTO)

4/5

**FIG. 4**

THIS PAGE BLANK (USPTO)

5/5

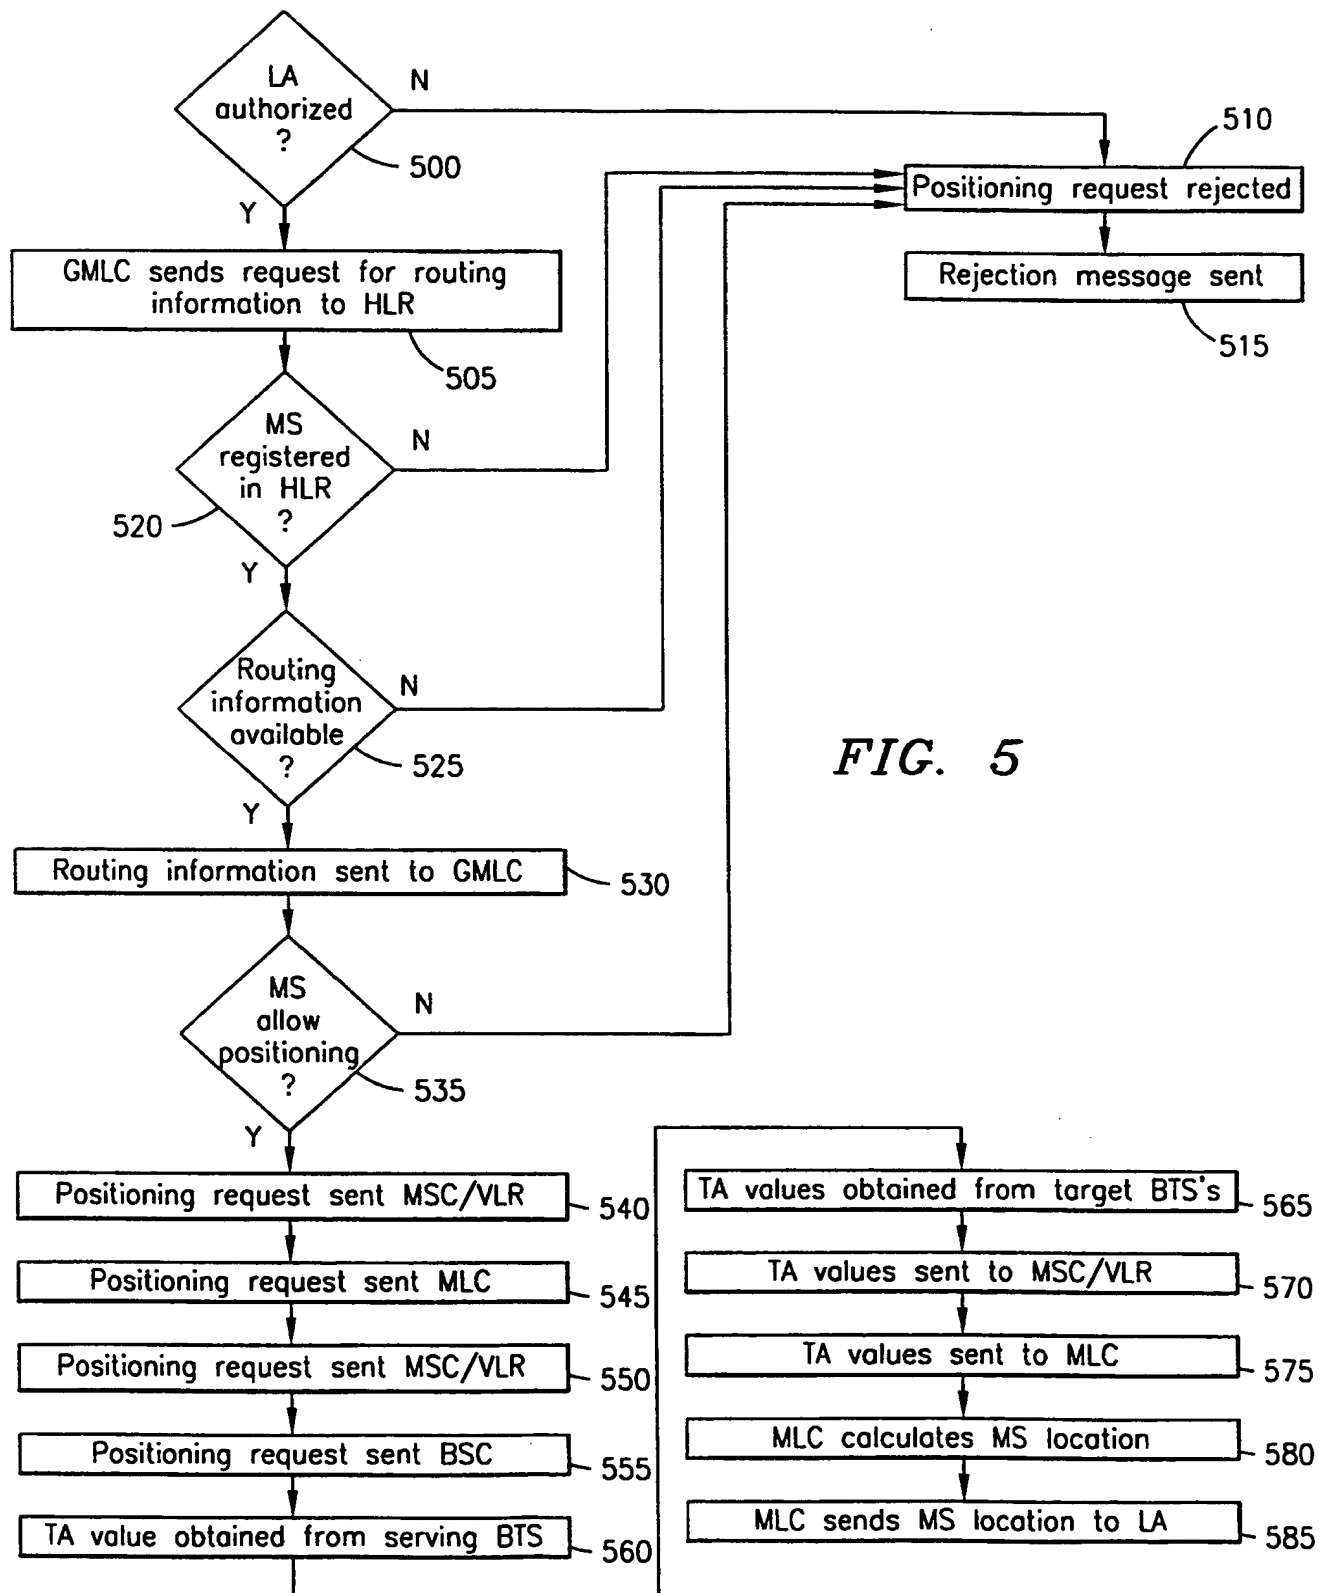

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/08584

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H07Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 317 305 A (DAEWOO TELECOM LTD) 18 March 1998 (1998-03-18)	1,4,8,11
Y	page 2, line 3 - line 21 page 5, line 18 - page 10, line 23 ---	2,3,6,9, 10,13
Y	WO 98 00988 A (ERICSSON GE MOBILE INC) 8 January 1998 (1998-01-08) page 9, line 12 - page 10, line 35 page 19, line 9 - line 24 page 29, line 29 - page 30, line 22 ---	2,3,6,9, 10,13
A	WO 97 24010 A (BELL COMMUNICATIONS RES) 3 July 1997 (1997-07-03) page 10, line 29 - line 37 page 18, line 11 - page 20, line 6 --- -/--	1,2,4,5, 8,9,11, 12

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

6 August 1999

Date of mailing of the international search report

18/08/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Pham, P

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/08584

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	<p>WO 98 52379 A (ERICSSON TELEFON AB L M)</p> <p>19 November 1998 (1998-11-19)</p> <p>page 12, line 18 - page 15, line 7</p> <p>-----</p>	1-4, 8-11

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/08584

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2317305 A	18-03-1998	NONE	
WO 9800988 A	08-01-1998	AU 3592797 A	21-01-1998
WO 9724010 A	03-07-1997	AU 5252896 A	17-07-1997
WO 9852379 A	19-11-1998	SE 509435 C	25-01-1999
		AU 7558298 A	08-12-1998
		SE 9701845 A	17-11-1998

THIS PAGE BLANK (USPTO)